


BS-678T

WALL MOUNT SPEAKER 6W ATT

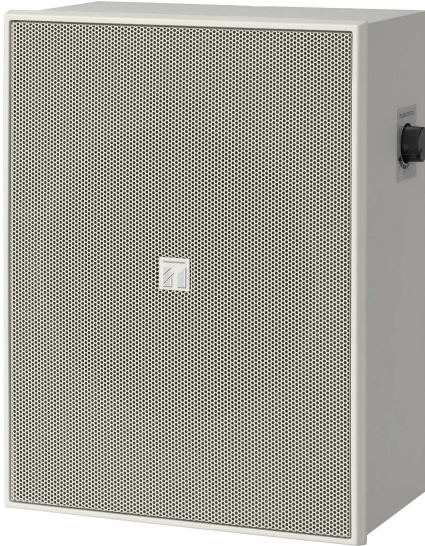

BS-678T have a built-in attenuator and can be connected to a 2-wire or 3-wire system. The push-in type input connector makes cable connections easy and allows bridge wiring. position of the transformer. Two built-in 6-inch double cone speaker units deliver high quality sound. if an outward force is applied to. The input impedance can be easily changed by changing the tap structure that permits direct wall-mounting with screws prevents the speaker from falling easily even. Either concealed in-wall wiring or exposed wiring can be used for speaker cable connection. The speaker. The BS-678T, of which cabinet is made of wood, can be installed in a vertical or horizontal orientation.


Key features

- Ideally suited for BGM and announcements
- Compact and unobtrusive design
- Quick and easy installation, which saves time on setting-up
- Horizontal / vertical direct wall installation
- A push-in terminal allows easy cable connections and bridge wiring
- Equipped with an attenuator

Specifications

Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 k Ω (6 W), 3.3 k Ω (3 W), 6.7 k Ω (1.5 W), 13 k Ω (0.8 W) 70 V line: 1.7 k Ω (3 W), 3.3 k Ω (1.5 W), 6.7 k Ω (0.8 W), 13 k Ω (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	150 Hz - 20 kHz (peak -20 dB)
Speaker Component	16 cm (6) double cone-type
Attenuation	OFF, 1 (-12 dB), 2 (-6 dB), 3 (0 dB)
Cable Requirements	600 V vinyl-insulated cable (IV wire or HIV wire) Solid wire: #0.8 - #1.6 mm (equivalent to AWG 20 - 14) 7-core twisted wire: 0.75 - 1.25 m# (equivalent to AWG 18 - 16)
Connection	Push-in connector (bridging terminal)
Finish	Baffle: HIPS, off-white (RAL 9010 or equivalent color) Cabinet: Particle board with pvc sheet, off-white (RAL 9010 or equivalent color) Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent color)
Dimensions	250 (W) x 190 (H) x 110 (D) mm (9.84 x 7.48" x 4.33") (excluding volume control knob)
Weight	1.7 kg (3.75 lb)
Included Accessories	Speaker mounting screw (4 x 35 (0.16 x 1.38") ...2"

Dimensions

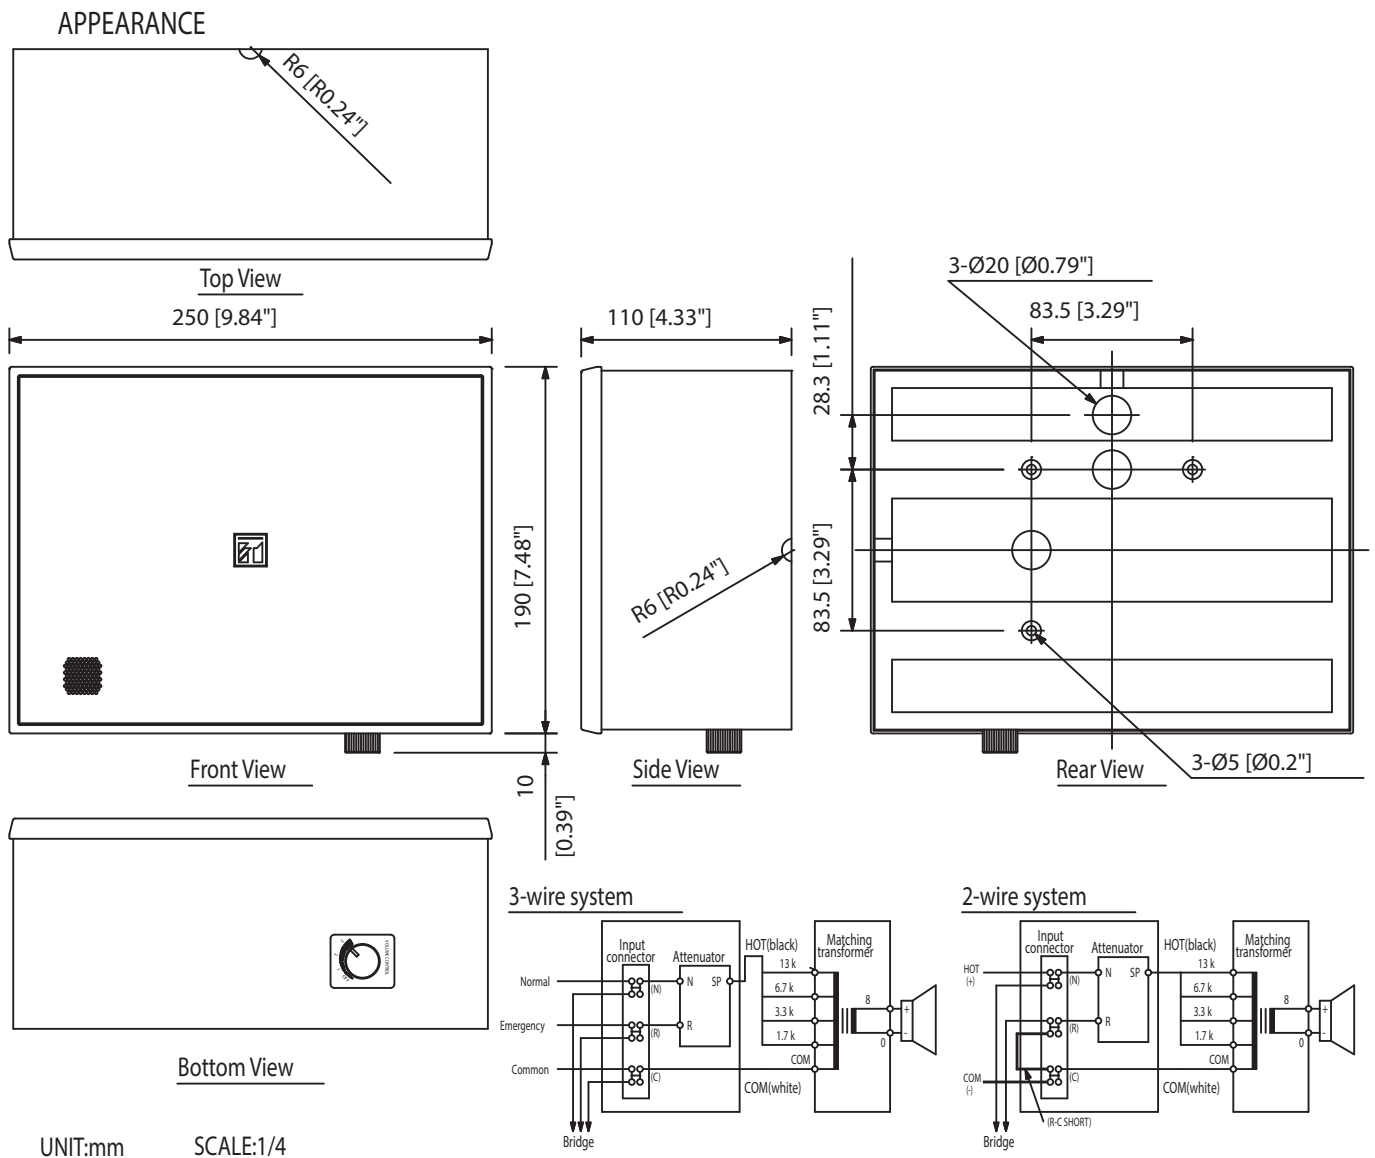

A&E specifications

The speaker shall be a 6" (16cm) double cone-type speaker suitable for wall mounting in vertical or horizontal orientation. Cable connection, with either concealed in-wall wiring or exposed wiring, shall be by means of a push-in connector (bridging terminal). Its front baffle should be easily mounted on or removed from the cabinet by using the V-shaped spring attached to the baffle. The speaker shall include a transformer having multiple taps (0.8W, 1.5W, 3W, 6W at 100V and 0.4W, 0.8W, 1.5W, 3W at 70V) adjustable, for easy changing of input impedance by changing the tap. The output sound pressure level at a distance of 1m with a 1W input level applied shall be 94 dB SPL. The speaker shall have a frequency response of 150Hz – 20kHz (-20dB). The speaker shall have a built-in attenuator enabling connection to a 2-wire or 3-wire system.

The speaker enclosure shall be constructed of particle board, with a pvc sheet, and the baffle of HIPS resin. The grille shall be surface-treated steel plate net. The speaker shall be available in off-white or black color. The unit shall have dimensions of 250 (W) x 190 (H) x 110 (D) mm (9.84" x 7.48" x 4.33"), and a weight of 1.7 kg (3.75 lbs.).

The speaker shall be a TOA model BS-678T/BS-678BT.