RM-210F

REMOTE MICROPHONE EXTENSION



The RM-210F is an expansion unit dedicated for the RM-300X Desk top remote microphone. The number of zone selection keys and indicators of the RM-300X can be increased in 10 units per RM-210F.


Key features

- 10 additional keys
- Up to 7 units can be used with each RM-300X Remote Microphone


Specifications

Power Source	Supplied from the optional RM-300X
AC Power Consumption	2.4 W (including power supply loss of the Emergency power panel) 0.4 W (standby, including power supply loss of the Emergency power panel)
Current Consumption	80 mA or less (increase in power input at the optional RM-300X)
User Control	Zone selection key x 10
Indicator	Status indicator x10, Selection indicator x 10
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80% RH (no condensation)
Finish	ABS resin, black, semi-gloss
Dimensions	110 (W) x 76.5 (H) x 215 (D) mm (4.33" x 3.01" x 8.46")
Weight	350 g (0.77 lb)
Included Accessories	Connection cable (8 pins, 8 ch (3.15") x 1, Joint bracket A x 2, Joint bracket B x 1, Screw for joint bracket x 12
Optional Accessories	Wall mounting bracket: WB-RM200
Compatible Model	Remote microphone: RM-300X


Dimensions



Rear View

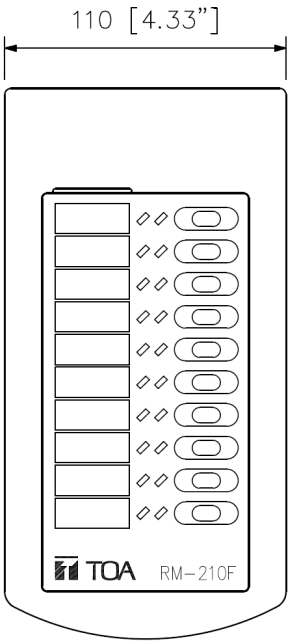

Top View

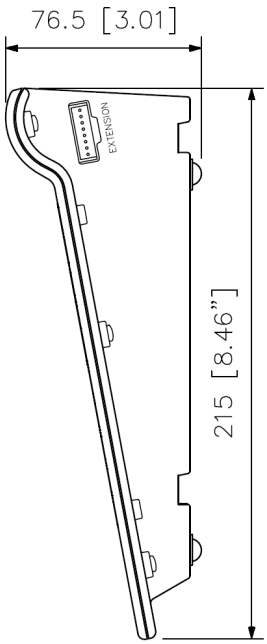

Side View

UNIT: mm

A&E specifications

UNDEFINED TEXT