# SR-C15BWP

LINE ARRAY SPEAKER



The SR-C15B Sub-woofer system is designed to be used in conjunction with the SR-C8L or SR-C8S Line array speaker. Recommended digital speaker processor is the DP-SP3 (option).


## Key features

- 38cm (15“) subwoofer
- Input connectors include screw terminal connections and two Neutrik NL4 type sockets
- High power handling
- Enclosure equipped with M8 threaded steel plates for the secure attachment of optional accessory brackets
- Accessory brackets for suspension and stand mounting


# Specifications

| | |
|---|---|
| Enclosure | Bass-reflex type |
| Power Handling | Continuous program: 450 W |
| Rated Impedance | 8 Ω |
| Sensitivity | 93 dB (1 W, 1 m) |
| Frequency Response | 40 - 400 Hz (when recommended parameters are applied by the optional DP-SP3) |
| Crossover Frequency | 125 Hz (when recommended parameters are applied by the optional DP-SP3) |
| Speaker Component | 38 cm (15) cone-type |
| Connected Cable | Direct cable withdrawal from internal speaker: #8.6 mm (#0.34) |
| Water Protection | IPX4 |
| Operating Temperature | -10# to +50# (14# to 122#) |
| Finish | Enclosure: Plywood, black, urethane coating<br>Front grille: Punched stainless steel, black, paint |
| Dimensions | 526.6 (W) x 594.8 (H) x 550 (D) mm (20.73 x 23.42" x 21.65") |
| Weight | 41 kg (90.39 lb) |
| Included Accessories | M8 connection bolt …4 |
| Optional Accessories | Rigging frame: SR-RF8WP |

# Dimensions

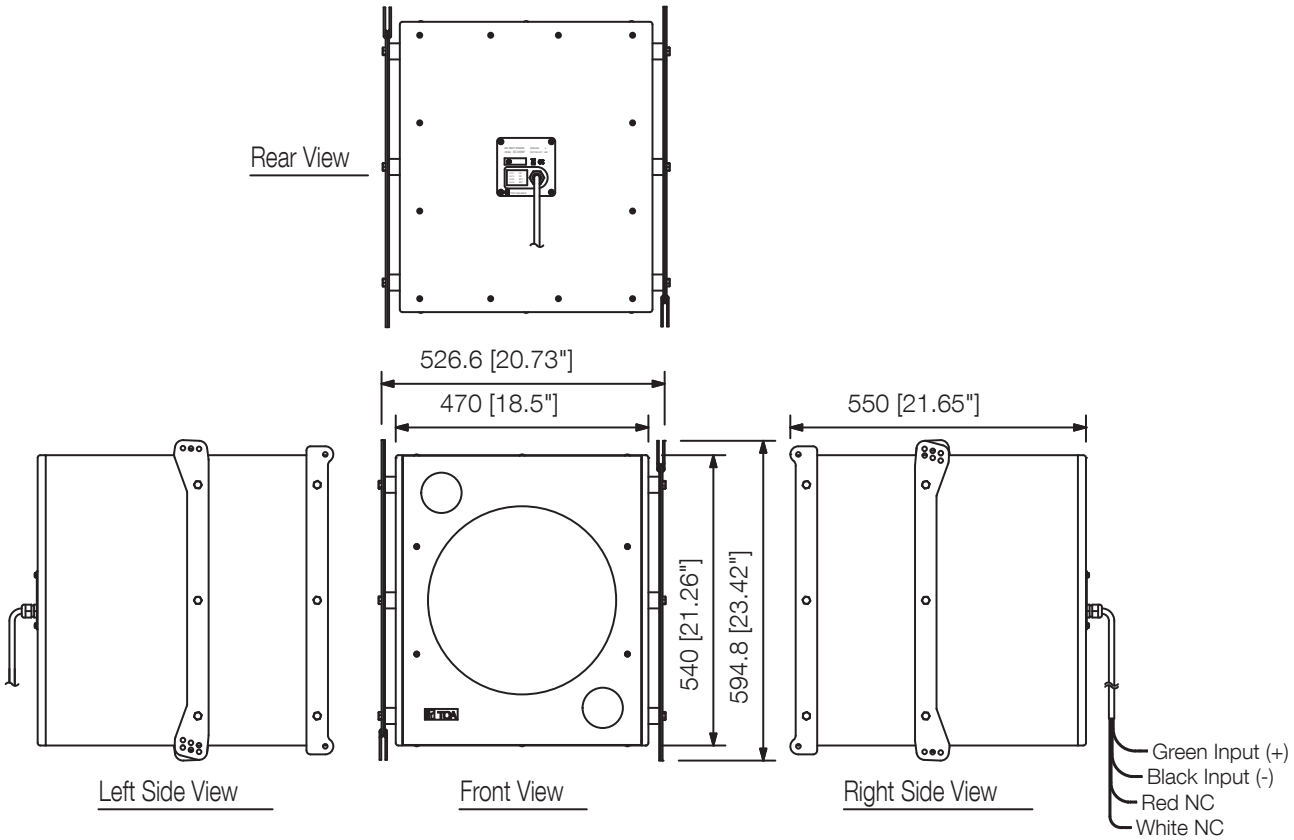


NOTE:
1. It features the water-protection construction (IPX4), however it is recommended that it be installed under roofs, eaves, or other locations not directly exposed to rain or snow.
2. Do not install the SR-C15BWP at places where it is likely to be corroded such as bath room, indoor pools, or seaside.
3. Install the speaker with its air hole down. The air hole are provided at the bottom surface.
4. For outdoor permanent installation, the installation angle of the speaker as shown at the right must be between 0° horizontal and 50° downward.
5. When permanently installing the speaker outdoors, inspect it periodically.




UNIT:mm SCALE:1/15

# A&E specifications

The speaker shall be sub-woofer system. The component shall consist one 15" (38 cm) woofer. The speaker shall include an integral input connection cable, 8.6 mm (0.34") outside diameter, 4-conductor, 3 m (9.84") long. The speaker shall meet the following performance criteria. Power handling: 450 W continuous program. Frequency response (10 dB below rated pressure sensitivity, with recommended crossover and equalization) 40 to 400 Hz. Sensitivity (1 W at 1 m): 93 dB. Impedance: 8 ohms nominal.
The speaker enclosure shall be made of plywood and finished with black urethane coating. The speaker grille shall be made from a single punched stainless steel plate and finished with black paint. The speaker shall comply with the IEC IPX4 standard for dust and water resistance and operate within a temperature range from -10°C to +50°C (14°F to 122°F). The dimensions (W x H x D) shall be 526.6 x 594.8 x 550 mm (20.73" x 23.42" x 21.65") and weight (including accessory brackets) shall be 41 kg (90.39 lbs.). The speaker enclosure shall be equipped with M8 threaded steel plates for the secure attachment of optional accessory brackets. Available accessory brackets for suspension and stand mounting shall be made of steel.
The loudspeaker shall be TOA model SR-C15BWP.
The rigging frame shall be TOA model SR-RF8WP.