SR-WB4

WALL MOUNTING BRACKET




The SR-WB4 bracket is used to mount the SR-S4L Line array speaker upright to the wall.

Key features

Specifications


Number of Speakers to be Mounted	Max. 2 (when jointed with an optional SR-EP4)
Finish	Steel plate, white, paint
Weight	4.6 kg (including accessories)
Included Accessories	Speaker mounting screw (M5 upset head) …16, Bracket assembling screw (M8 upset head) …8
Optional Accessories	Extension plate: SR-EP4
Product Composition	Speaker mounting bracket A …1, Speaker mounting bracket B …1, Bracket base …2

Dimensions

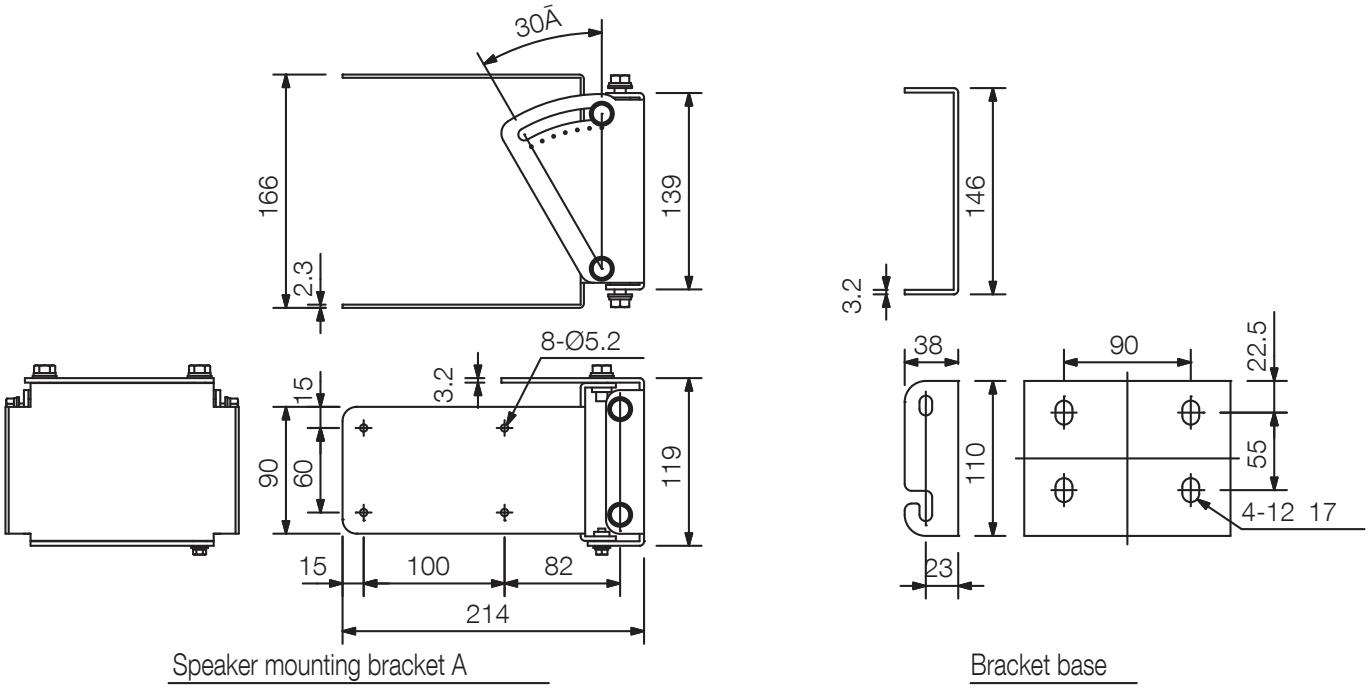


Published on 2026/02/14


Dimensions

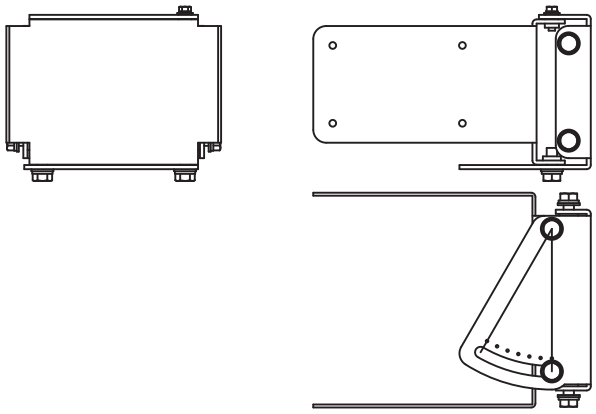

Speaker mounting bracket B




(When Bracket A is attached to the upper part of the speaker.)




(When Bracket B is attached to the upper part of the speaker.)

Note: When Speaker Bracket A is attached to the upper part of the speaker, the speaker can be tilted right at an angle of up to 30°.
When Speaker Bracket B is attached to the upper part of the speaker, the speaker can be tilted left at an angle of up to 30°.

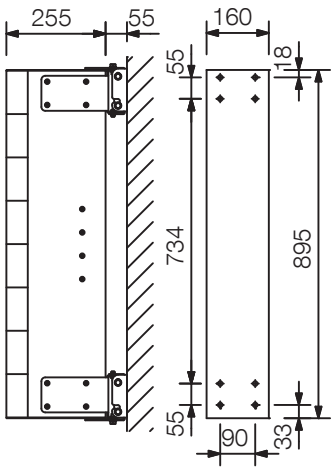

(Wall bracket mounting position)

(When installing one SR-S4L)

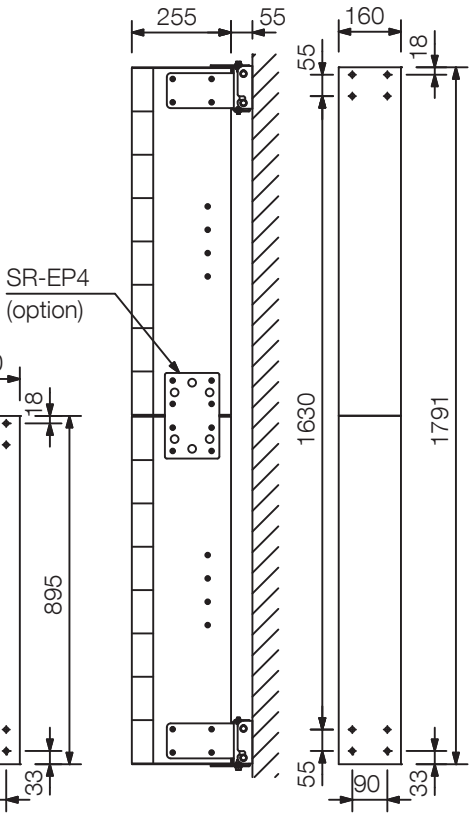

(Wall bracket mounting position)

(When 2 SR-S4L are jointed)

Mounting example (scale: 1/20)

UNIT:mm SCALE:1/6

A&E specifications

Wall mounting kit for one or two (with SR-EP4) slim line array speaker SR-S4L, swiveling according to mounting horizontally to 30 ° to the left or right, including all accessories for mounting the speaker. Solid construction made of white painted steel sheet.