

## TS-792L-AS

### DELEGATE UNIT WITH LONG MICROPHONE



The TS-792L is a Delegate unit for TOA Conference system. The compact and lightweight design makes it easy to install and store. Placing the speech button in the ON position permits speech and disable the speaker to prevent feedback. If the speech button is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored. The TS-792L delegate unit come with a long microphone as a standard accessory.





### Key features

## Specifications

\*0 dB = 1 V

|                             |                                                                                                                                                                                                                                                                      |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Source                | 36 V DC, 30 mA or less (supplied from the Central Unit TS-7912D, TS-7912DW)                                                                                                                                                                                          |
| Output                      | 36 V DC, 30 mA or less (supplied from the Central Unit TS-7912D, TS-7912DW)                                                                                                                                                                                          |
| Control                     | Speech: Microphone, speaker on-off control by speech button<br>Volume control: Headphone/Recording and monitor speaker volume adjustable x 2                                                                                                                         |
| Microphone Unit (Accessory) | Electret condenser microphone<br>Directivity: Unidirectional<br>Impedance: 1.8 k $\Omega$<br>Sensitivity: -37 dB (1 kHz 0 dB = 1 V/Pa)<br>Frequency Response: 100 Hz - 13 kHz<br>LED indicator: Speech indicator (ring type) Blue<br>Length: 518 mm<br>Weight: 105 g |
| Operating Temperature       | 0 °C to +40 °C (32 °F to 104 °F)                                                                                                                                                                                                                                     |
| Operating Humidity          | 90 %RH or less (no condensation)                                                                                                                                                                                                                                     |
| Finish                      | Upper case: ABS resin, dark grey, paint<br>Lower case: ABS resin, black, paint                                                                                                                                                                                       |
| Dimensions                  | 145.3 (W) x 70.7 (H) x 150.5 (D) mm (5.72" x 2.78" x 5.93") (Excluding microphone unit)                                                                                                                                                                              |
| Weight                      | 800 g (1.76 lb) (Excluding microphone unit)                                                                                                                                                                                                                          |
| Included Accessories        | Long microphone unit x 1                                                                                                                                                                                                                                             |
| Optional Accessories        | Extension cord: YR-790-3, YR-790-10                                                                                                                                                                                                                                  |

## Dimensions

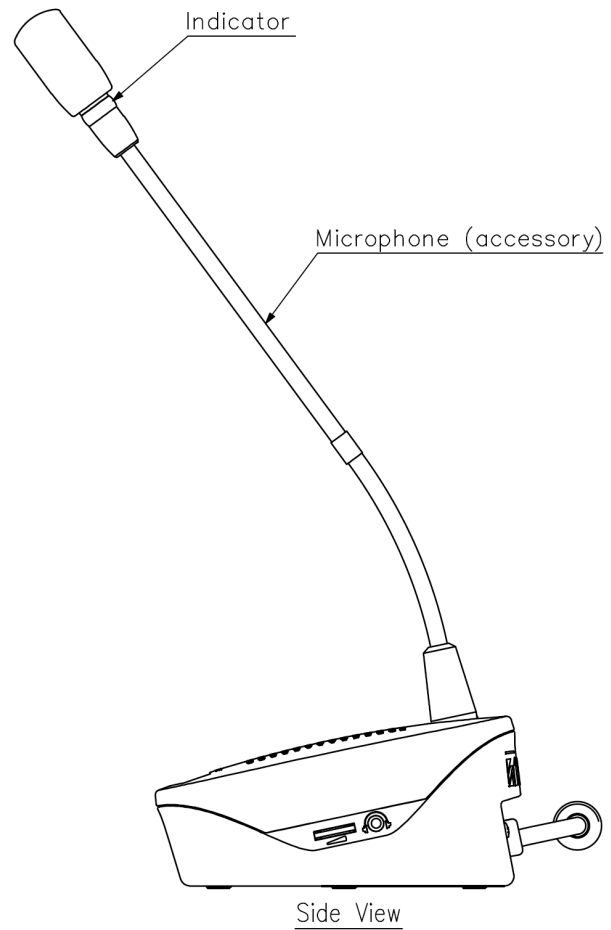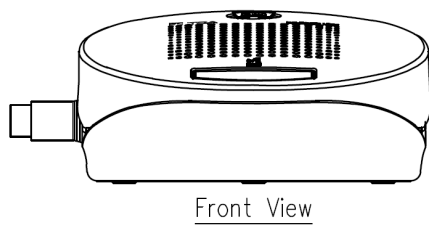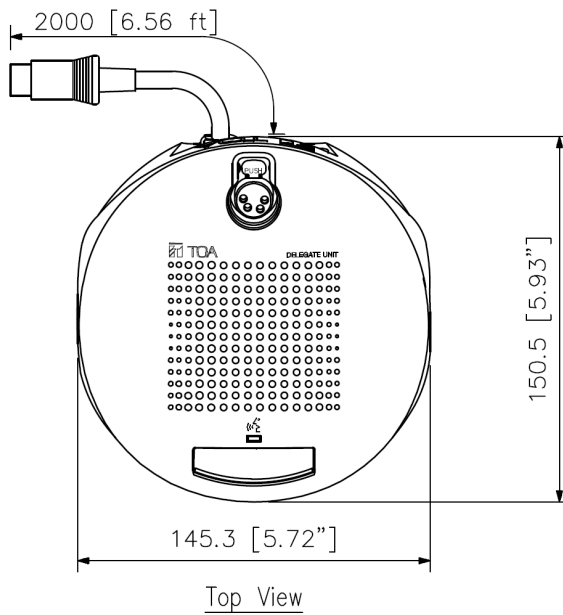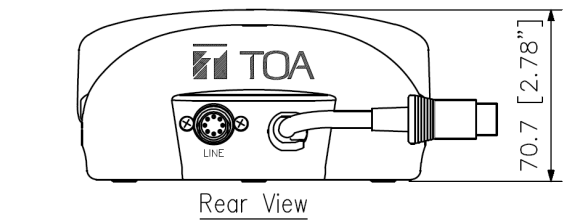

UNIT:mm