

WM-2110 01ER

DESK-TOP TRANSMITTER



TOA's WM-2110 is a Desk-top Transmitter designed to use 470 MHz band radio signals. Ideal, easy-to-use system for on-site tours in noisy environments, simultaneous interpretation and extended listening coverage in difficult situations.

Key features


- The remote control function permits the unit's transmission to be controlled from external equipment.
- Input sensitivity can be switched between MIC and LINE signal levels depending on the type of equipment to be connected to the input.
- A maximum of 5 different channels can be simultaneously used in the same location.

Specifications

Power Source	230 V AC, 50 Hz
Power Consumption	3 W
Modulation	Frequency modulation
Frequency Range	470 MHz band (5 ch) (470.075, 470.150, 470.375, 470.625, 470.725 MHz)
RF Carrier Power	5 mW
Oscillator	PLL synthesizer
Pre-emphasis	50 μ s
Input Level	Standard input: -54 dB* / -60 dB* / -66 dB* (Mic), -12 dB* / -18 dB* / -24 dB* (Line) Maximum input: -30 dB* / -36 dB* / -42 dB* (Mic), +12 dB* / +6 dB* / 0 dB* (Line) Mic/Line selection, 600 Ω , unbalanced, phone jack
Remote Input	Make control input: Release voltage: 2 V DC, short-circuit current: 0.2 mA, loop resistance: under 100 Ω Remote control mode: Transmit radio signal when at make
Operating Temperature	-10 °C to +40 °C (14 °F to 104 °F)
Finish	ABS Resin, dark gray
Dimensions	140 (W) x 31 (H) x 119.5 (D) mm
Weight	270 g (0.60 lb)
Included Accessories	AC-DC adapter (1.8 m) x 1, Screw driver x 1, 3-pole phone plug cord (2 m) x 1

*0 dB = 1V

Dimensions

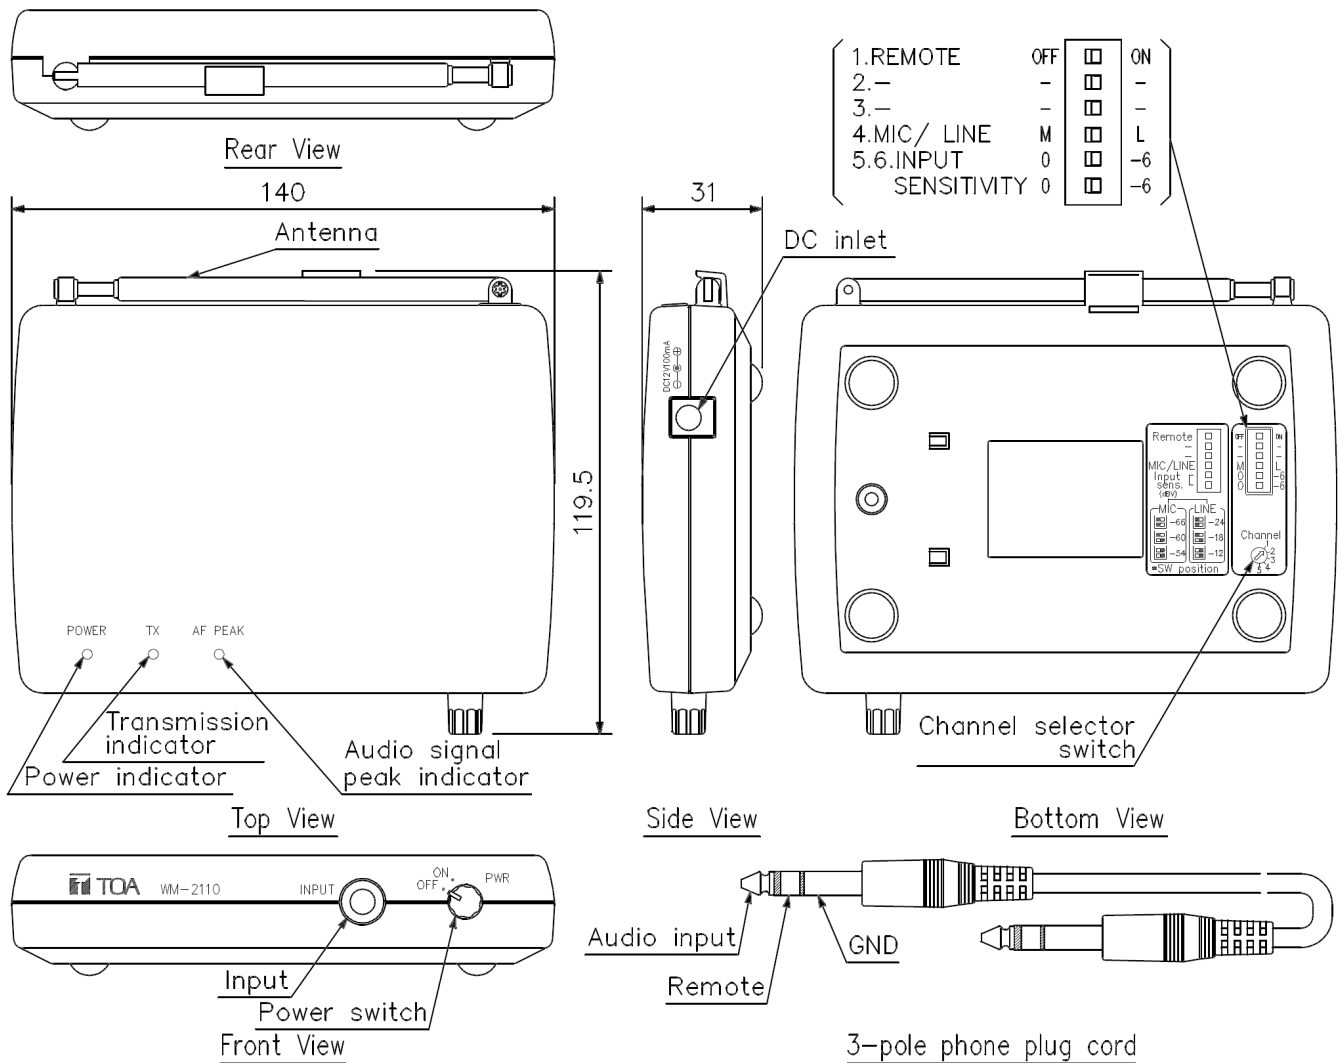

UNIT:mm